

**THANK YOU FOR DOWNLOADING THIS MANUAL. I HOPE IT
HELPS YOU RESOLVE ANY ISSUES YOU HAVE WITH YOUR
GAME.**

**THIS MANUAL WAS PURCHASED AND SCANNED BY
BASEMENT ARCADE ASSOCIATES.
WWW.BASEMENTARCADE.COM, AND IS OFFERED FOR FREE
AS A DOWNLOAD FROM OUR SITE.**

**THIS PDF IS NOT TO BE DISTRIBUTED ON ANY COLLECTION
CD/DVD, NOR IS IT TO BE LINKED VIA ANY OTHER INTERNET
SITE WITHOUT PERMISSION FROM US. LIKEWISE, IT IS NOT
TO BE DISTRIBUTED FROM ANY OTHER SITE WITHOUT OUR
PERMISSION.**

**ABIDING BY THESE REQUESTS WILL ENSURE THE CONTINUING
SUPPORT OF NEW MANUALS ADDED TO OUR SITE.**

**ALL ORIGINAL COPY RIGHTS ARE HELD BY THE ORIGINAL
OWNERS**

KJ-XX15 Publication A, Issue 3



SERVICE AND OPERATION MANUAL

**KJ-XX15 SERIES, 13", 19"
OPEN FRAME COLOR MONITORS**

HAPP CONTROLS
Manufacturer of Electronic Controls

Information in this publication current as of April, 2000.
Information subject to change as display technology advances.

This monitor has been designed and manufactured to deliver high performance video. For continued peak performance use and safe operation, only high quality Happ Controls replacement parts or their exact specified equivalent when servicing.

SAFETY PRECAUTIONS AND WARNINGS

Service Warning

This display contains HIGH VOLTAGE capable of delivering LETHAL quantities of energy. Service should only be attempted by trained personnel familiar with the potential dangers inherent with high voltage equipment.

Safety Related Component Warning

Certain components used in Happ Controls color monitors are critical for safe operation of the display. These parts numbers are marked by (Δ) in the parts list and on the schematic diagram. It is essential that these safety critical components be replaced only with exact manufacturer specified components to prevent the possibility of excessive X-radiation emission, electrical shock, fire, or premature component failure. Modifying the original design without written approval from Happ Controls is expressly forbidden, will void the original parts and labor warranty, and may result in creating a hazardous situation.

X-Radiation Warning

COMPONENTS WHICH MAY AFFECT POTENTIAL EXCESS EMISSION OF X-RADIATION IN THE HORIZONTAL DEFLECTION AND HIGH VOLTAGE CIRCUITS (INCLUDING THE PICTURE TUBE), ARE INDICATED IN THE PARTS LIST BY A (\star). USE ONLY TYPE AND RATING OF REPLACEMENT COMPONENT AS SHOWN IN THE PARTS LIST.

1. The only potential source of X-radiation emission is the picture tube. When the high voltage and horizontal deflection circuits are operating correctly there is no possibility of excess X-radiation emission. NEVER attempt to modify these circuits.
2. Periodically check the high voltage with a reliably calibrated meter for values not in excess of manufacturers recommendations. See High Voltage Shut-down Circuit, page 4, for further details.

CRT Warning

All picture tubes used in Happ Controls monitors are equipped with an integral implosion protection system. The picture tube is, however, a highly evacuated component whose outside surfaces are subject to strong external forces. Care must be exercised so as not to bump or scratch the tube during installation or servicing as this may cause the tube to implode, resulting in possible personal injury and property damage. Shatter-proof goggles must be worn by individuals while handling the CRT or installing the display in the cabinet. Do not handle the CRT by the neck.

1. Always ensure the high voltage at the anode cap is fully discharged prior to handling or service.
2. Replace picture tube only with same type and number.

Product Safety and Service Guidelines

1. Service should be performed only after reading all of the warnings and precautions in this manual and as labeled on the CRT and chassis.
2. Where a short circuit has occurred, replace all components that indicate evidence of overheating. Also check for evidence of overheating or poor connection on all plastic connectors.
3. Inspect wiring for frayed leads and damaged insulation. When service is required, observe original lead dress assume lead dress is followed as from the factory, especially in the high voltage circuitry area.
4. Do not expose this display to rain or place in areas where the potential for exposure to moisture is high. Additionally, do not mount the remote VR PWB if so equipped outside the cabinet or in areas where there is a possibility of exposure to moisture.
5. All protective devices must be reinstalled per original design.

PERFORMANCE AND OPERATING DATA

1. Power Supply

This color monitor shall maintain the specified performance in the range described below :

Frequency : 47-63Hz
Voltage : 90-264 Vac
Consumption : Less than 70 Watts

2. Input Signal

The reference video controller used for adjustment and test will guarantee the performance described below.

Video signals

Red, Green, Blue analog input
300 ohm termination to ground
Level : 0 to 1.2Vpp
Polarity : Positive

Sync signals

Separate H/V sync input
1 kΩ termination to ground
Level : TTL level
Polarity : Positive or Negative

3. Horizontal Deflection

Scanning Frequency : 15.75KHz
Ratrace period : <8.0μs

4. Vertical Deflection

Scanning Frequency : 50-120Hz
Ratrace period : <900μs

5. Linearity

± 5%

6. Picture Size Regulation

Static Regulation Dynamic Regulation
2% 1.5%

7. Geometric Distortion

It is acceptable that pincushion, trapezoidal, parallelogram, barrel distortion, out of orthogonality, and various waves can appear all together. If the data area parameter remains within the limits of 2%.

8. Degaussing

This color monitor shall employ an automatic degaussing circuit. The degaussing sequence shall be selfactivated at the time of switch-on. After a degaussing cycle the demagnetizing circuit shall recover and be fully functional again min. 60 minutes after switch-off.

9. High Voltage

This color monitor shall employ an X-radiation shut-down protection with internal circuitry.
14" : 26KV
20" : 27KV

10. Environmental Conditions

Temperature : 10° ~ 40° C(Operating)
Humidity : 10 ~ 90%, no condensation

OPERATING INSTRUCTIONS

1. Apply line AC, 90V~264V, in your locality to the monitor through W801.
2. Apply signal source to the monitor through W201.
3. Set up user adjustable controls.

All controls are preset at the factory for optimum performance. If adjustment is necessary to suit program material, most adjustments can be made using only the controls on the remote VR PWB. Other controls in the monitor should be adjusted only if those controls have been tampered with or if major repairs were necessary on the monitor.

CONTROLS

1. Remote VR PWB

Contrast, VR101
Brightness, VR102
Horizontal Centering, VR103
Horizontal Size, VR106
Vertical Centering, VR104
Vertical Size, VR105

2. Main PWB

Horizontal Hold, VR301
Vertical Hold, VR401

3. Flyback Transformer

Focus Adjustment
Screen Adjustment

4. Neck PWB

Red Cut-off, VR701
Green Cut-off, VR703
Blue Cut-off, VR705
Red Gain, VR702
Green Gain, VR704
Blue Gain, VR706

These controls in main, neck PWB and flyback transformer have been preset and sealed at the factory and should not require further attention.

HIGH VOLTAGE SHUT-DOWN CIRCUIT

The chassis of this color monitor has been designed to emit a minimum of soft X-radiation, in accordance with US DHHS rules 21 CFR, subchapter J, applicable at date of manufacture.

A high voltage shut-down circuit, as shown below, guarantees horizontal oscillation shut-down.

A flyback pulse is generated at pin 10 of flyback transformer. This pulse is fed through resistive divider network to pin 13 of IC U302


The resistive divider is such that the value of resistors R319, R320 and R321 is set so that zener diode ZD303 will conduct when the flyback pulse becomes abnormally high.


A reference voltage is maintained by IC U302 internal circuitry. When ZD302 is conducting and the flyback pulse becomes equal to or greater than the reference voltage within IC U302, internal IC circuitry will act to shut off drive TR Q501.

Thus horizontal oscillation, and therefore high voltage, will be effectively shut down.

The protective circuit is released by turning off the monitor and reapplying power.

If this circuit is working to shut down the monitor, then immediate service is required.

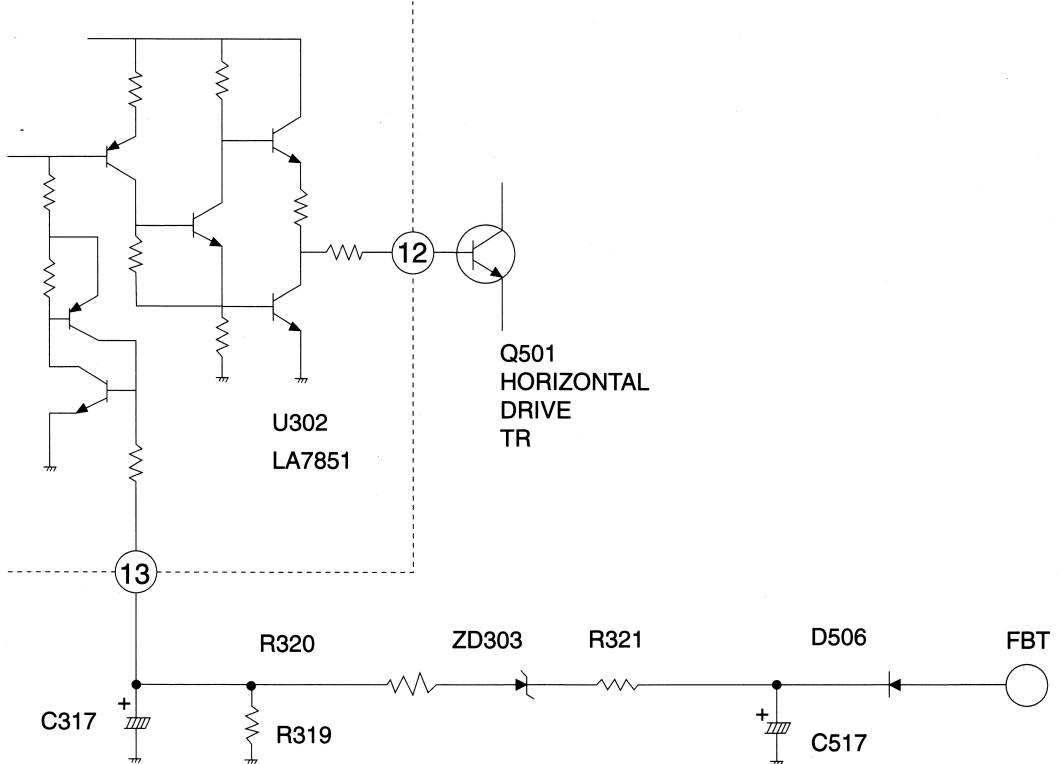


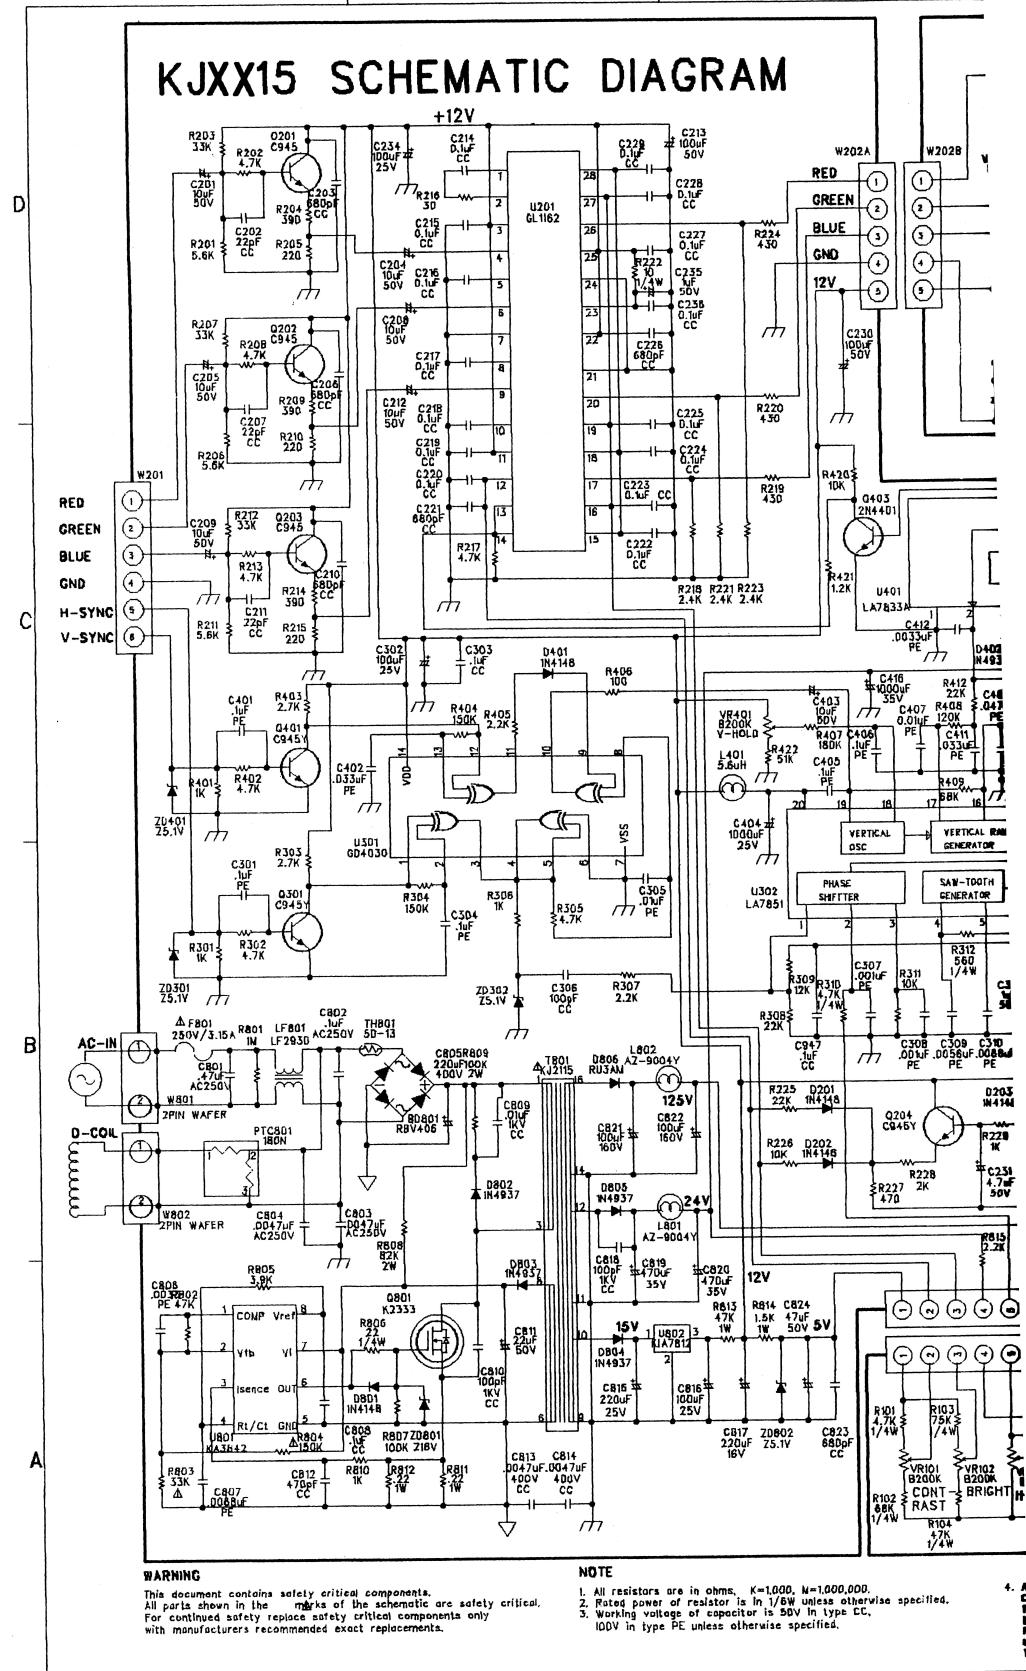

3

2

1

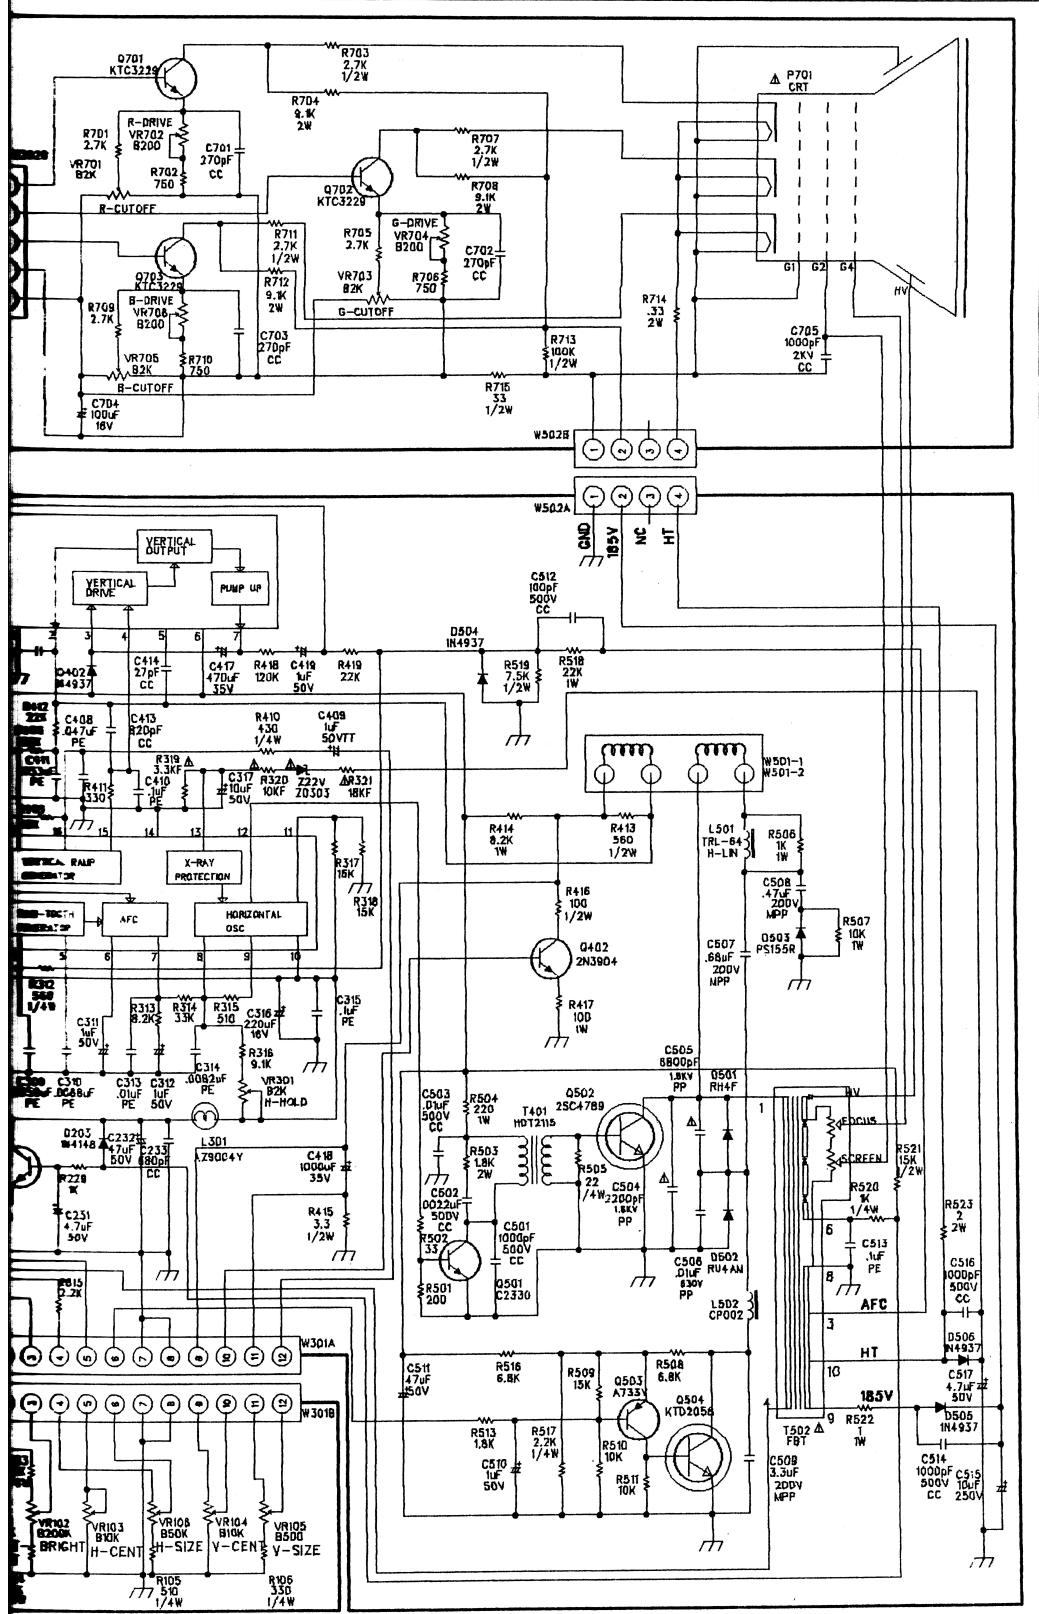

4. Abbreviation:

- CC : Ceramic disk capacitor
 PE : Polyester film capacitor
 MP : Metallized polyester film capacitor
 PP : Polypropylene film capacitor
 MPP : Metallized polypropylene film capacitor
 TT : Tantalum electrolytic capacitor

DRAWHYOUNG JIN SYSTEMS DATED 1988. 04. 23 COMPANUK JAE COROPERATION DRAWING NO.:

CHECKED: DATED: TITLE: KJ 2115 REV:

QC: DATED: RELEASED: CODE: * * * SIZE: SHEET 1 OF 1

PARTS LIST

LOCATION NO.	PARTS NAME	SPECIFICATIONS	LOCATION NO.	PARTS NAME	SPECIFICATIONS
TRANSFORMERS, COILS					
L301	INDUCTOR	AZ9004Y	VR401	RES, VARIABLE	B200K,SEMI,065C
L401	INDUCTOR	5.6 μ H	VR701	RES, VARIABLE	B2K,SEMI,117E
L501	COIL, LIN	TRL-64	VR702	RES, VARIABLE	B200,SEMI,117E
L502	COIL, CHOKE	CP002	VR703	RES, VARIABLE	B2K,SEMI,117E
L801	INDUCTOR	AZ9004Y	VR704	RES, VARIABLE	B200,SEMI,117E
L802	INDUCTOR	AZ9004Y	VR705	RES, VARIABLE	B2K,SEMI,117E
LF801	LINE FILTER	SLF-2501	VR706	RES, VARIABLE	B200,SEMI,117E
T501	TRANS, DRIVE	1034G	R101	RES, CARBON	4.7 k Ω
T502	FBT	FP0021	R102	RES, CARBON	68 k Ω
T801	TRANS, POWER	MAIN2115	R103	RES, CARBON	75 k Ω
INTEGRATED CIRCUITS					
U201	IC	LM1205	R104	RES, CARBON	47 k Ω
U301	IC	GD4030B	R105	RES, CARBON	510 Ω
U302	IC	LA7851	R106	RES, CARBON	430 Ω
U401	IC	LA7833	R201	RES, CARBON	5.6 k Ω
U801	IC	KA3842	R202	RES, CARBON	4.7 k Ω
U802	IC	KA7812	R203	RES, CARBON	33 k Ω
SEMI-CONDUCTORS					
Q201	TR	KSC945Y	R204	RES, CARBON	390 Ω
Q202	TR	KSC945Y	R205	RES, CARBON	220 Ω
Q203	TR	KSC945Y	R206	RES, CARBON	5.6 k Ω
Q204	TR	KSC945Y	R207	RES, CARBON	33 k Ω
Q301	TR	KSC945Y	R208	RES, CARBON	4.7 k Ω
Q401	TR	KSC945Y	R209	RES, CARBON	390 Ω
Q402	TR	2N3904	R210	RES, CARBON	220 Ω
Q403	TR	2N4401	R211	RES, CARBON	5.6 k Ω
Q501	TR	KSC2330	R212	RES, CARBON	33 k Ω
Q502	TR	2SC4769	R213	RES, CARBON	4.7 k Ω
Q503	TR	KSA733Y	R214	RES, CARBON	390 Ω
Q504	TR	KTD2058	R215	RES, CARBON	220 Ω
Q701	TR	KTC3229	R216	RES, CARBON	30 Ω
Q702	TR	KTC3229	R217	RES, CARBON	4.7 k Ω
Q703	TR	KTC3229	R218	RES, CARBON	2.4 k Ω
Q801	TR	2SK1342	R219	RES, CARBON	430 Ω
D201	DIODE	1N4148	R220	RES, CARBON	430 Ω
D202	DIODE	1N4148	R221	RES, CARBON	2.4 k Ω
D203	DIODE	1N4148	R222	RES, CARBON	10 Ω
D401	DIODE	1N4148	R223	RES, CARBON	2.4 k Ω
D402	DIODE	1N4937	R224	RES, CARBON	430 Ω
D501	DIODE, DAMPER	RH4F	R225	RES, CARBON	22 k Ω
D502	DIODE, DAMPER	RU4AM	R226	RES, CARBON	10 Ω
D503	DIODE	PS156R	R227	RES, CARBON	470 Ω
D504	DIODE	1N4937	R228	RES, CARBON	2 k Ω
D505	DIODE	1N4937	R229	RES, CARBON	1 k Ω
D506	DIODE	1N4937	R301	RES, CARBON	1 k Ω
D801	DIODE	1N4148	R302	RES, CARBON	4.7 k Ω
D802	DIODE	1N4937	R303	RES, CARBON	2.7 k Ω
D803	DIODE	1N4937	R304	RES, CARBON	150 k Ω
D804	DIODE	1N4937	R305	RES, CARBON	4.7 k Ω
D805	DIODE	1N4937	R306	RES, CARBON	1 k Ω
D806	DIODE	RU3AM	R307	RES, CARBON	2.2 k Ω
RESISTORS					
TH801	PTC	5D-13	R308	RES, CARBON	22 k Ω
VR101	RES, VARIABLE	B200K,SEMI,92E	R309	RES, CARBON	12 k Ω
VR102	RES, VARIABLE	B200K,SEMI,92E	R310	RES, CARBON	4.7 k Ω
VR103	RES, VARIABLE	B10K,SEMI,92E	R311	RES, CARBON	10 k Ω
VR104	RES, VARIABLE	B10K,SEMI,92E	R312	RES, CARBON	560 Ω
VR105	RES, VARIABLE	B500 Ω ,SEMI,92E	R313	RES, CARBON	8.2 k Ω
VR106	RES, VARIABLE	B30K,SEMI,92E	R314	RES, CARBON	33 k Ω
VR301	RES, VARIABLE	B2K,SEMI,065C	R315	RES, CARBON	510 Ω
			R316	RES, CARBON	9.1 k Ω
			R317	RES, CARBON	15 k Ω
			R318	RES, CARBON	15 k Ω
			R319	RES, CARBON	3.3 k Ω
			R320	RES, CARBON	10 k Ω
			R321	RES, CARBON	18 k Ω
			R401	RES, CARBON	1 k Ω

PARTS LIST

LOCATION NO.	PARTS NAME	SPECIFICATIONS	LOCATION NO.	PARTS NAME	SPECIFICATIONS
R402	RES, CARBON	4.7 kΩ	R808	RES, MOF	68 kΩ
R403	RES, CARBON	2.7 kΩ	R809	RES, MOF	100 kΩ
R404	RES, CARBON	150 kΩ	R810	RES, CARBON	1 kΩ
R405	RES, CARBON	2.2 kΩ	R811	RES, MOF	0.22 Ω
R406	RES, CARBON	100 Ω	R812	RES, MOF	0.22 Ω
R407	RES, CARBON	220 kΩ	R813	RES, MOF	1 Ω
R408	RES, CARBON	120 kΩ	R814	RES, MOF	1.5 kΩ
R409	RES, CARBON	68 kΩ	R815	RES, CARBON	2.2 kΩ
R410	RES, CARBON	470 Ω			
R411	RES, CARBON	330 Ω			
R412	RES, CARBON	22 kΩ			
R413	RES, CARBON	560 Ω			
R414	RES, MOF	560 Ω			
R415	RES, CARBON	3.9 Ω			
R416	RES, CARBON	100 Ω			
R417	RES, MOF	100 Ω			
R418	RES, CARBON	120 kΩ			
R419	RES, CARBON	22 kΩ			
R420	RES, CARBON	10 kΩ			
R421	RES, CARBON	1 kΩ			
R422	RES, CARBON	820 kΩ			
R501	RES, CARBON	200 Ω			
R502	RES, CARBON	33 Ω			
R503	RES, MOF	1.8 kΩ			
R504	RES, MOF	220 Ω			
R505	RES, CARBON	22 Ω			
R506	RES, MOF	1 kΩ			
R507	RES, MOF	10 kΩ			
R508	RES, CARBON	6.8 kΩ			
R509	RES, CARBON	15 kΩ			
R510	RES, CARBON	10 kΩ			
R511	RES, CARBON	10 kΩ			
R512	JUMPER WIRE				
R513	RES, CARBON	1.8 kΩ			
R516	RES, CARBON	6.8 kΩ			
R517	RES, CARBON	2.2 kΩ			
R518	RES, MOF	22 kΩ			
R519	RES, CARBON	7.5 kΩ			
R520	RES, CARBON	1 kΩ			
R521	RES, CARBON	15 kΩ			
R522	RES, MOF	1 Ω			
R523	RES, MOF	2 Ω			
R701	RES, CARBON	2.7 kΩ			
R702	RES, CARBON	680 Ω			
R703	RES, CARBON	2.7 kΩ			
R704	RES, MOF	9.1 kΩ			
R705	RES, CARBON	2.7 kΩ			
R706	RES, CARBON	680 Ω			
R707	RES, CARBON	2.7 kΩ			
R708	RES, MOF	9.1 kΩ			
R709	RES, CARBON	2.7 kΩ			
R710	RES, CARBON	680 Ω			
R711	RES, CARBON	2.7 kΩ			
R712	RES, MOF	9.1 kΩ			
R713	RES, CARBON	100 kΩ			
R714	RES, MOF	0.33 Ω			
R715	RES, CARBON	33 Ω			
R801	RES, CARBON	1 MΩ			
R802	RES, CARBON	47 kΩ			
R803	RES, CARBON	6.8 kΩ			
R804	RES, CARBON	39 kΩ			
R805	RES, CARBON	6.8 kΩ			
R806	RES, CARBON	22 Ω			
R807	RES, CARBON	100 kΩ			
CAPACITORS					
C201	CAP, ELT	10μF, 50V			
C202	CAP, CC	22pF, 50V			
C203	CAP, CC	680pF, 50V			
C204	CAP, ELT	10μF, 50V			
C205	CAP, ELT	10μF, 50V			
C206	CAP, CC	680pF, 50V			
C207	CAP, CC	22pF, 50V			
C208	CAP, ELT	10μF, 50V			
C209	CAP, ELT	10μF, 50V			
C210	CAP, CC	680pF, 50V			
C211	CAP, CC	22pF, 50V			
C212	CAP, ELT	10μF, 50V			
C213	CAP, ELT	100μF, 25V			
C214	CAP, CC	0.1μF, 50V			
C215	CAP, CC	0.1μF, 50V			
C216	CAP, CC	0.1μF, 50V			
C217	CAP, CC	0.1μF, 50V			
C218	CAP, CC	0.1μF, 50V			
C219	CAP, CC	0.1μF, 50V			
C220	CAP, CC	0.1μF, 50V			
C221	CAP, CC	680pF, 50V			
C222	CAP, CC	0.1μF, 50V			
C223	CAP, CC	0.1μF, 50V			
C224	CAP, CC	0.1μF, 50V			
C225	CAP, CC	0.1μF, 50V			
C226	CAP, CC	680pF, 50V			
C227	CAP, CC	0.1μF, 50V			
C228	CAP, CC	0.1μF, 50V			
C229	CAP, CC	0.1μF, 50V			
C230	CAP, ELT	100μF, 25V			
C231	CAP, ELT	4.7μF, 50V			
C232	CAP, ELT	47μF, 50V			
C233	CAP, CC	680pF, 50V			
C234	CAP, ELT	100μF, 25V			
C301	CAP, PE	0.1μF, 100V			
C302	CAP, ELT	100μF, 25V			
C303	CAP, CC	0.1μF, 50V			
C304	CAP, PE	0.1μF, 100V			
C305	CAP, PE	0.01μF, 100V			
C306	CAP, CC	100pF, 50V			
C307	CAP, PE	0.001μF, 100V			
C308	CAP, PE	0.001μF, 100V			
C309	CAP, PE	0.0056μF, 100V			
C310	CAP, PE	0.0068μF, 100V			
C311	CAP, ELT	1μF, 50V			
C312	CAP, ELT	1μF, 50V			
C313	CAP, PE	0.01μF, 100V			
C314	CAP, PE	0.0082μF, 100V			
C315	CAP, PE	0.1μF, 100V			
C316	CAP, ELT	220μF, 16V			

PARTS LIST

LOCATION NO.	PARTS NAME	SPECIFICATIONS	LOCATION NO.	PARTS NAME	SPECIFICATIONS
C317	CAP, ELT	10μF, 50V	C816	CAP, ELT	100μF, 25V
C318	CAP, CC	0.1μF, 50V	C817	CAP, ELT	220μF, 25V
C401	CAP, PE	0.1μF, 100V	C818	CAP, CC	100pF, 1KV
C402	CAP, PE	0.033μF, 100V	C819	CAP, ELT	470μF, 35V
C403	CAP, ELT	10μF, 50V	C820	CAP, ELT	470μF, 35V
C404	CAP, ELT	1000μF, 25V	C821	CAP, ELT	100μF, 160V
C405	CAP, PE	0.1μF, 100V	C822	CAP, ELT	100μF, 160V
C406	CAP, PE	0.1μF, 100V	C823	CAP, CC	680pF, 50V
C407	CAP, PE	0.01μF, 100V	C824	CAP, ELT	47μF, 50V
C408	CAP, PE	0.047μF, 100V			
C409	CAP, TT	1μF, 35V			
C410	CAP, PE	0.1μF, 100V			
C411	CAP, PE	0.033μF, 100V			
C412	CAP, PE	0.033μF, 100V			
C413	CAP, CC	820μF, 50V			
C414	CAP, CC	27pF, 50V			
C415	CAP, CC	0.001μF, 50V			
C416	CAP, ELT	1000μF, 35V			
C417	CAP, ELT	470μF, 35V			
C418	CAP, ELT	1000μF, 35V			
C419	CAP, ELT	1μF, 50V			
C501	CAP, CC	0.001μF, 500V			
C502	CAP, CC	0.0022μF, 500V			
C503	CAP, CC	0.01μF, 500V			
C504	CAP, PP	2200pF, 1.6KV			
C505	CAP, PP	6800pF, 1.6KV			
C506	CAP, PP	153μF, 630V			
C507	CAP, MPP	0.68μF, 200V			
C508	CAP, MPP	0.47μF, 200V			
C509	CAP, MPP	3.3μF, 200V			
C510	CAP, ELT	1μF, 50V			
C511	CAP, ELT	1μF, 50V			
C512	CAP, CC	100pF, 500V			
C513	CAP, PE	0.1μF, 100V			
C514	CAP, CC	0.001μF, 500V			
C515	CAP, ELT	10μF, 250V			
C516	CAP, CC	0.001μF, 500V			
C517	CAP, ELT	4.7μF, 50V			
C701	CAP, CC	270pF, 50V			
C702	CAP, CC	270pF, 50V			
C703	CAP, CC	270pF, 50V			
C704	CAP, ELT	100μF, 16V			
C705	CAP, CC	0.001μF, 2KV			
C801	CAP, X	0.47μF, AC250V			
C802	CAP, X	0.1μF, AC250V			
C803	CAP, Y	0.0047μF, 400V			
C804	CAP, Y	0.0047μF, 400V			
C805	CAP, ELT	220μF, 400V			
C806	CAP, PE	0.0033μF, 100V			
C807	CAP, PE	0.0068μF, 100V			
C808	CAP, CC	0.1μF, 50V			
C809	CAP, CC	0.01μF, 1KV			
C810	CAP, CC	100pF, 1KV			
C811	CAP, ELT	22μF, 50V			
C812	CAP, CC	470pF, 50V			
C813	CAP, Y	0.0047μF, 400V			
C814	CAP, Y	0.0047μF, 400V			
C815	CAP, ELT	220μF, 25V			

HAPP CONTROLS

Manufacturer of Electronic Controls

106 Garlisch Drive · Elk Grove, IL60007 USA