

THANK YOU FOR DOWNLOADING THIS MANUAL. I HOPE IT HELPS YOU RESOLVE ANY ISSUES YOU HAVE HAD WITH YOUR GAME.

THIS MANUAL WAS PURCHASED, AND SCANNED BY BASEMENT ARCADE ASSOCIATES, WWW.BASEMENTARCADE.COM AND IS OFFERED FOR FREE DOWNLOAD AT OUR SITE.

THIS PDF IS NOT TO BE DISTRIBUTED ON ANY COLLECTION CD / DVD, NOR IS TO BE LINKED TO VIA ANY OTHER INTERNET SITE WITHOUT PERMISSION FROM US. LIKEWISE IT IS NOT TO BE DISTRIBUTED FROM ANY OTHER SITE WITHOUT OUR PERMISSION.

ABIDING BY THESE REQUESTS, WILL INSURE THE CONTINUING SUPPORT OF NEW MANUALS ADDED TO OUR SITE.

ALL ORIGINAL COPYRIGHTS HELD BY THEIR ORIGINAL OWNERS, THIS PDF COPYRIGHTED BASEMENT ARCADE ASSOCIATES.

--=MARK=--


ULTIMATE TENNIS取扱説明書

OPERATOR'S MANUAL

©BANPREST 1993 ©Copyright 1993 Art and Magic SA.

アルチメイトテニス

ULTIMATE TENNIS



株式会社バンプレスト

ULTIMATE TENNIS

マニュアルテスト: MANUAL TEST

- ①ディップスイッチNo.Aの1番をONにして電源をたちあげます。
Turn on the dip switch No.A at the position "1" and raise the power source.
- ②テスト画面が現表示され、各入出力テストが出来ます。
The test screen emerges, and test of each input and output are possible.

コントロールパネル: CONTROL PANEL

2人同時プレイ、途中参加可能です。(SW・B-8がライナーの場合)
The game can be played by 2 players, both from the start and from the midway.



[8方向レバー] [HARD SHOT] [SOFT SHOT] [LOB]
8-direction leber

Pair panel for simultaneos playing by 2 players.

注) 通常の3つボタンコンパネをご使用の場合は Dip SW-Bの8をONにして下さい。

注意: CAUTION

PCボードは精密機器のため運送時等には御注意ください。
As the PC bord is a precision mechanism, pay through attention during transportation and in handling.

音声はモノラル出力です。

The voice is monaural.

電源: Required Power Capacity.


+5V 5A or more: +12V 1A or more

束線図: CONNECTION PIN ASSIGNMENT

SOLDER SIDE	TERMINAL	PARTS SIDE	
GND	A	1	GND
GND	B	2	GND
+5V	C	3	+5V
+5V	D	4	+5V
NC	E	5	NC
+12V	F	6	+12V
NC	H	7	NC
NC	J	8	COIN COUNTER1
NC	K	9	NC
SPEAKER(-)	L	10	SPEAKER(+)
NC	M	11	NC
V-GREEN	N	12	V-RED
V-SYNC	P	13	V-BLUE
SERVICE SW	R	14	V-GND
NC	S	15	NC
COIN SW2	T	16	COIN SW1
START SW2	U	17	START SW1
2P UP	V	18	2P UP
2P DOWN	W	19	1P DOWN
2P LEFT	X	20	1P LEFT
2P RIGHT	Y	21	1P RIGHT
2P A BUTTON	Z	22	1P A BUTTON
2P B BUTTON	a	23	1P B BUTTON
2P C BUTTON	b	24	1P C BUTTON
NC	c	25	NC
NC	d	26	NC
GND	e	27	GND
GND	f	28	GND
ハンダ面(下)	ターミナル		ハンダ面(上)

JAMMA仕様: Specification. JAMMA

コインカウンターはDC12V: Coin Counter DC12V

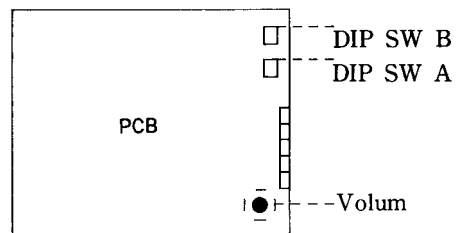

Dip-switches setting

- A**
- 1 Test mode ON/OFF*
 - 2 Free play ON/OFF*
 - 3 } Left counter
 - 4 }
 - 5 }
 - 6 }
 - 7 } Right counter
 - 8 }

- B**
- 1 } Game difficulty
 - 2 }
 - 3 Attract sound *ON/OFF
 - 4 } Lost balls for one credit
 - 5 }
 - 6 Set for a match ON=3, *OFF=1
 - 7 Starting score ON=0-0, *OFF=4-4
 - 8 Buttons configuration ON=LINEAR, *OFF=TRIANGULAR

DIP SWITCH A

Left counter	1coin	1credit
	1coin	2credits
	1coin	3credits
	1coin	4credits
	1coin	5credits
	1coin	6credits
	2coins	1credit
	4coins	1credit

Switch 5

OFF
OFF
OFF
OFF
ON
ON
ON
ON

Switch 4

OFF
OFF
ON
ON
OFF
OFF
ON
ON

Switch 3

OFF*
ON
OFF
ON
OFF
ON
OFF
ON

Right counter

1coin	1credit
2coins	1credit
3coins	1credit
4coins	1credit
5coins	1credit
6coins	1credit
1coin	2credits
1coin	4credits

Switch 8

OFF
OFF
OFF
OFF
ON
ON
ON
ON

Switch 7

OFF
OFF
ON
ON
OFF
OFF
ON
ON

Switch 6

OFF*
ON
OFF
ON
OFF
ON
OFF
ON

DIP SWITCH B

Game difficulty	Easy
	Normal
	Hard
	Very Hard

Switch 2

OFF
OFF
ON
ON

Switch 1

OFF
ON*
OFF
ON

Ball for one credit

1credit	5balls
1credit	6balls
1credit	7balls
1credit	8balls

Switch 5

OFF
OFF
ON
ON

Switch 4

OFF
ON*
OFF
ON

*Factory setting